



**LOW VOLTAGE INDOOR VOLTAGE TRANSFORMERS**

**SINGLE POLE VOLTAGE TRANSFORMERS**

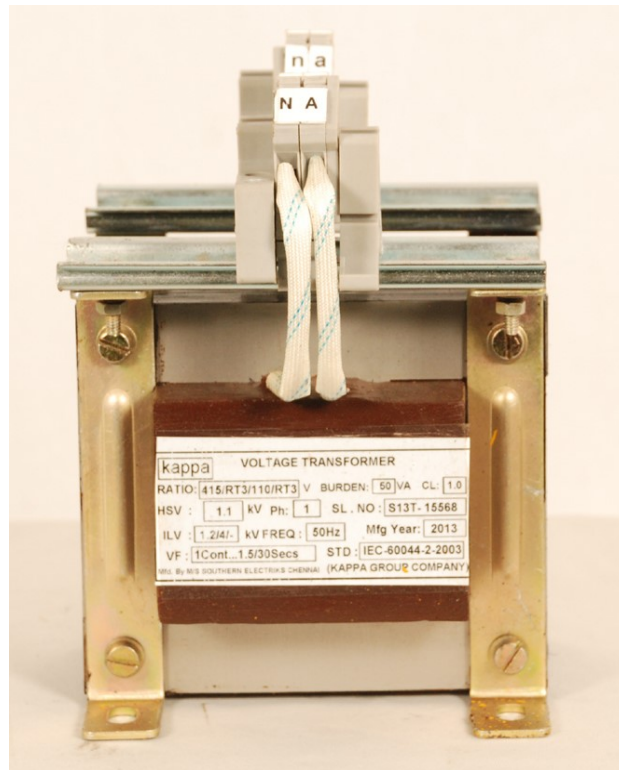

# Kappa

Current Technology

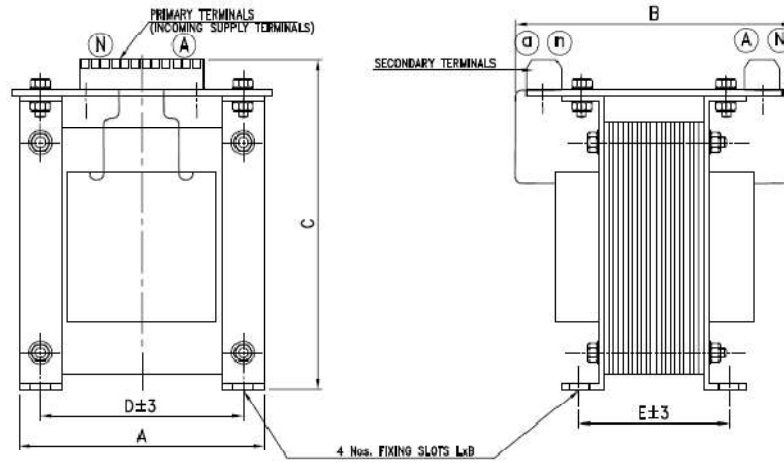

**NOTES:**

1. GENERAL TOLERANCE ±5mm
2. No. OF SECONDARY TERMINALS DEPENDS ON THE No. OF SECONDARIES & RATIOS.
3. INCOMING SUPPLY TO BE CONNECTED TO INCOMING SUPPLY TERMINAL A, N ONLY.
4. PRIMARY NEUTRAL (N) SEC. NEUTRAL (n, 1n, 2n) AS PROVIDED TO BE EARTHED IN SERVICE.
5. ACRYLIC TERMINAL SHROUDING CAN BE PROVIDED ON REQUEST, HEIGHT +25mm.

### TABLE OF DIMENSIONS

Part No.		Max burden for accy Sec -1			Sec-2	Voltage factor	Dimension in mm					Wt in Kg	Slot L*B	
Resin cast Part no	Tape insulated Part no	3/3 P	0.2	0.5	1	3P	A	B	C	D	E			
5136-VEC-216-08	5120-VTP-215-01				30		1.9/8 hrs	115	120	140	95	70	4	12*6
5136-VEC-216-09	5120-VTP-215-02				25	25	1.9/8 hrs	115	130	140	95	82.5	5	12*6
5136-VEC-216-09	5120-VTP-215-02				50		1.9/8 hrs	115	130	140	95	82.5	5	12*6
5136-VEC-216-11	5120-VTP-215-04		20	100	200	50	1.9/8 hrs	155	145	170	128	88	9	16*8
5136-VEC-216-12	5120-VTP-215-05		20	100	200	200	1.9/8 hrs	155	155	170	128	100	10.5	16*8
5136-VEC-216-13					100	100	1.9/8 hrs	115	145	145	95	100	7.5	12*6
5136-VEC-216-14		25					1.9/8 hrs	96	110	125	80	62.5	2.5	10*6