


THREE PHASE 50 Hz OIL/AIR COOLED AUTO TRANSFORMERS

DRAWING AND TABLE OF DIMENSIONS

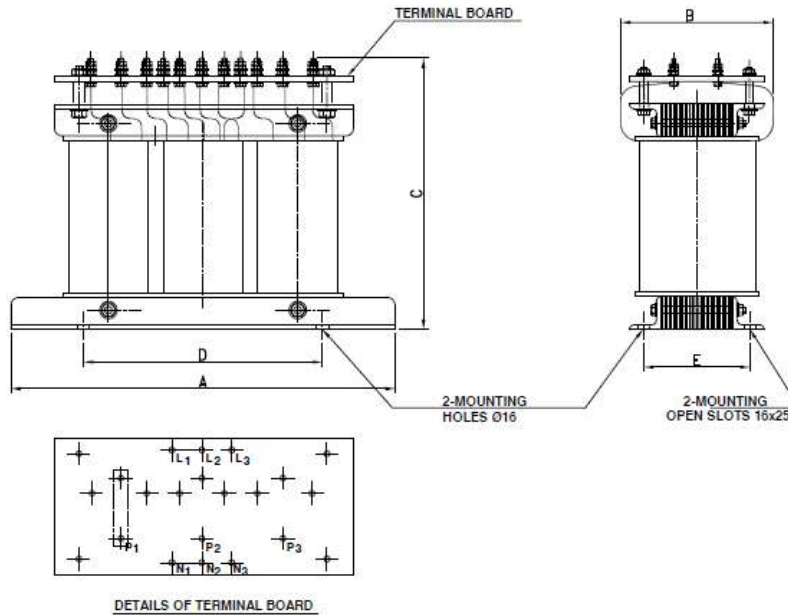

Item no	Rating in HP OIL Cooled	Rating in HP AIR Cooled	A mm	Bmm	C mm	Dmm	E mm	Weight(Kgs)
1	10	10	300	200	275	250	130	25
2	20,30	20,30,40	375	200	275	300	130	30
3	40,50,60	50,60	400	220	325	350	130	50
4	75,100,125	75,100	400	240	340	350	130	60
5	150,175	125,150,175	400	260	450	350	170	75
6	200,250	200	500	300	450	450	170	115
7	300,350	250	600	325	500	500	155	150
8	400,450,500	300,350,400	650	350	550	550	155	165
9	550,600,650	450,500,550	750	400	580	600	170	200
10	700,750,800	600,650	750	400	650	650	170	250
11	900	700,750,800	875	500	725	750	170	275

TOLERANCE: ± 5 mm

Note: a) Preferred tapplings :i) 40%,60% & 80% ii) 50%,65% & 80% iii) 40%,60% & 79%

b) Dimensions are based on standard duty cycle of 6 starts/hour and 20 seconds/star.

Change in duty cycle may entail change in dimensions.

c) Dimensions for HT Autotransformers on request.